




# 4LCY LEAD-CALCIUM 4LY LEAD-ANTIMONY

**FOR TELECOMMUNICATIONS APPLICATIONS**  
CAPACITIES FROM 290 TO 660 AMPERE-HOURS

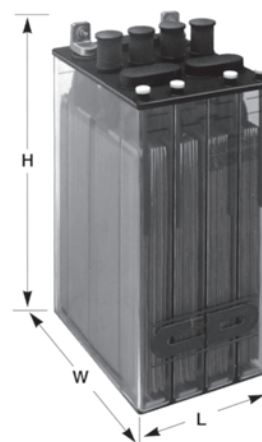

4LCY-420

C&D Technologies flooded batteries are engineered to provide superior performance and reliability over the life of the product. These batteries are designed using proprietary techniques and quality components and materials for reduced maintenance and extended battery life.

## FEATURES AND BENEFITS

- Four-cell design offers reduced length for optimum space utilization (shorter racks)
- Fewer bolted connectors per battery string reduce installation and maintenance costs
- Flame-retardant covers enhance battery plant safety
- Suspended positive plate permits free growth without pressure on jar and cover
- Snap-on, intercell-connector insulating covers
- Terminals accessible for measurement of individual cell voltages
- Vacuum-assisted, bottom-pour, positive-grid casting assures plate quality and long life
- Soft rubber post seal minimizes stress on post

## SPECIFICATIONS

Plates	Height	Width	Thickness
Positive	15 in (381 mm)	12 in (305 mm)	0.250 in (7.9 mm)
Negative	15 in (381 mm)	12 in (305 mm)	0.180 in (5.3 mm)
Outside Negative	15 in (381 mm)	12 in (305 mm)	0.130 in (3.3 mm)
Electrolyte height above plates	2.88 in (73 mm)		
Sediment space	0.63 in (16 mm)		
Electrolyte at 77°F (25°C)	Sulfuric acid, 1.215 specific gravity nominal		
Float voltages	2.19–2.21 volts per cell (calcium) 2.15–2.17 volts per cell (antimony)		
Container (Standard)	Thermoplastic, transparent, SAN (standard), polycarbonate (optional)		
Container (Optional)	Transparent, flame-retardant polycarbonate Flammability ratings: UL 940-HB ASTM D-635 self-extinguishing		
Cover	High impact, flame-retardant thermoplastic with tongue-and-groove seal. Flammability ratings: UL94 V-0 ASTM D-635 self-extinguishing. LO1>32		
Separator	Microporous with fibrous glass mat		
Safety vent system	Flame arrester type with dust cover		
Terminals	Two 0.50 in x 1.38 in (12.7 mm x 35 mm) cast lead terminals Two 1 in (25 mm) square posts per unit		
Withdrawal Tube (Optional)	One per cell		

## NOMINAL RATES AT 77°F (25°C) IN 1.215 NOMINAL SG. (INCLUDES CONNECTOR DROP) AMPERES

Final Volts	Models	24Hr	12Hr	8Hr	5Hr	3Hr	2Hr	1Hr
1.88	4LCY/LY-290	11	21	29	42	60	76	108
	4LCY/LY-420	17	31	43	61	86	111	157
	4LCY/LY-544	23	41	56	78	102	144	203
	4LCY/LY-660	27	48	67	95	135	174	246
1.86	4LCY/LY-290	12	22	31	44	63	80	115
	4LCY/LY-420	17	32	44	64	90	116	167
	4LCY/LY-544	24	42	58	82	117	151	216
	4LCY/LY-660	28	50	70	100	142	183	262
1.84	4LCY/LY-290	12	23	32	46	65	84	122
	4LCY/LY-420	18	33	46	66	94	121	176
	4LCY/LY-544	25	44	60	85	121	158	228
	4LCY/LY-660	29	52	73	104	148	191	277
1.75	4LCY/LY-290	15	26	36	51	73	95	145
	4LCY/LY-420	21	38	52	74	105	137	210
	4LCY/LY-544	29	51	69	96	135	178	272
	4LCY/LY-660	34	60	83	116	165	215	330

\* Rates shown represent average values and are subject to IEEE-485 (6.2.4). Additional ratings available on the C&D Technologies Battery Selection Application Program at [www.cdpowercom.net](http://www.cdpowercom.net).

Type of Cell (CPR code number)		Cells per unit	Plates per unit	Normal rates 77°F (25°C) (includes connector voltage drop) Ampere-hours (1.75 F.V.)				Overall dimensions			Approx. wt. lbs (kgs)		Electrolyte Per Cell lbs (kgs)	Pure Sulfuric Acid per cell lbs (kgs)
Calcium	Antimony			8 Hr	5 Hr	3 Hr	1 Hr	L in (mm)	W in (mm)	H in (mm)	Net Filled	Dom. Packed		
4LCY-290 (164422)	4LCY-290			4	5	290	253	218	145	10.08 (256)	14.12 (356)	22.75 (578)		
4LCY-420 (162232)	4LCY-420	4	7	420	366	315	210	10.08 (256)	310 (140.6)	325 (147.4)			18 (8.2)	5.4 (2.4)
4LCY-544	4LCY-544	4	9	544	474	408	272	15.00 (381)	395 (179.2)	415 (188.2)			25 (11.3)	7.5 (3.4)
4LCY-660 (164423)	4LCY-660	4	11	660	575	495	330	15.00 (381)	450 (204.1)	470 (213.2)			23 (10.4)	6.9 (3.1)

Note: Electrolyte weighs approximately 10 lbs per gallon (1.215 kg per liter).



Global Corporate Headquarters 200  
Precision Rd. Horsham, PA19044 USA  
customersvc@cdtechno.com  
www.cdtechno.com

©2022 C&D Technologies Inc. Any data, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application.

Copyright 2022 C&D TECHNOLOGIES, INC. Printed in U.S.A. 12-325 0115/CD