



Liebert®

EXM UPS

10-250 kVA/kW


Efficient, Scalable, Intelligent
Power Optimized for Midsize IT



A Midsize UPS As Dynamic As Your Needs

Liebert® EXM 3-Phase AC UPS

- 10-250kVA, 208 & 480 Volt Native
- Unity Power Factor
- Up to 99% Efficient
- Optimized Ancillaries provide Flexible Deployment
- UL 924 Listed
- Next Generation Scalable Functionality
- Next Generation Touchscreen Control Panel
- 480V Models Qualified for Use with Lithium-ion Batteries and Flywheels

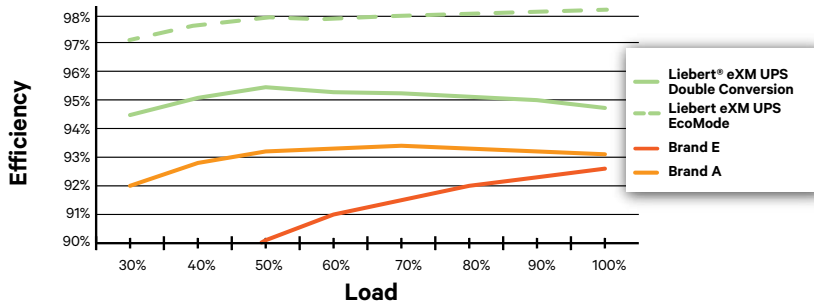


Efficient and Economical So You Can Control Your Costs

The Liebert EXM UPS was purposefully designed to provide efficient power protection that can meet your operating and capital requirements.

- Unity Power Factor ensures more power is provided in a smaller footprint, thus increasing system capacity while minimizing cabling and installation costs
- Delivers high efficiency levels throughout the capacity range
- 208 or 480 volt systems
- Transformer-free design saves space, capital, weight and shipping costs
- Superior operating efficiencies are realized through both the Eco-Mode option, which performs at 99% and the Double Conversion Mode, which delivers 97% (480V models)
- ENERGY STAR® qualified

Unity Power Factor Makes a Difference

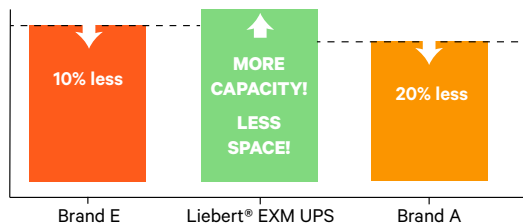

Based on a 100kVA 100A
100% rated breaker

The Liebert EXM UPS is ideal for:



- Small to midsize IT applications
- Edge of the network operations
- Midsize/regional colocation facilities
- Testing, medical and telecom systems
- Emergency lighting




Flexible Configurations and Deployment Options

Adapt and Scale with Ease


The flexible, scalable, redundant design of the Liebert® EXM UPS is available in many system configurations to ensure optimal power protection.

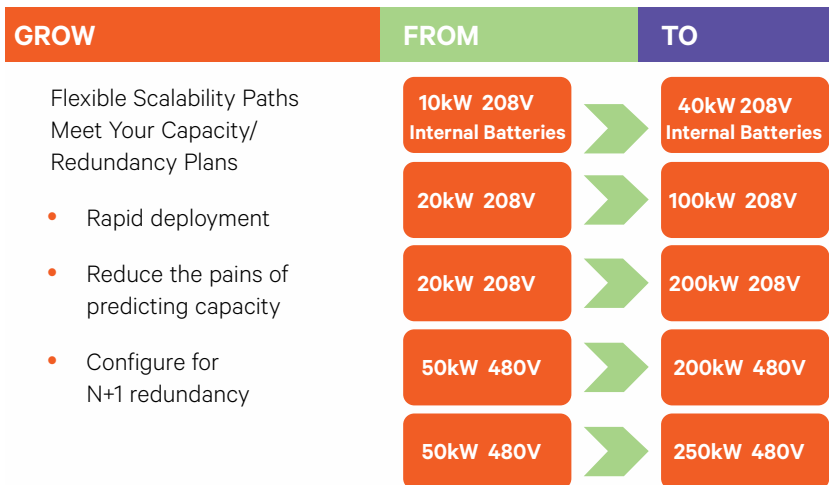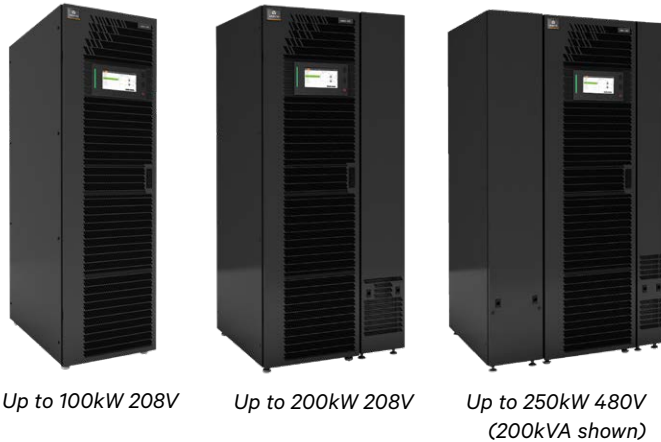

Single Module System (SMS)

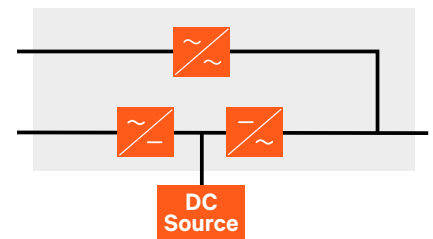

Distribute Bypass

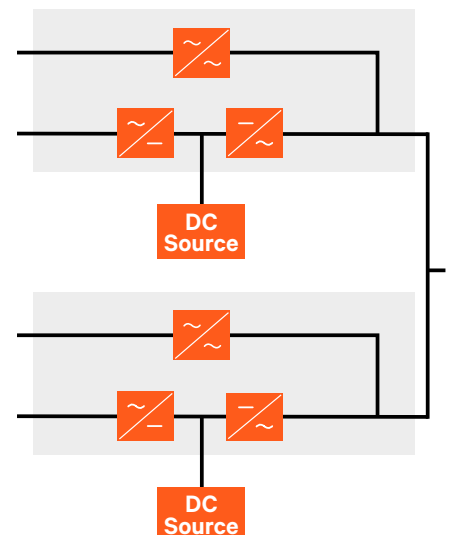

Availability Designed In

On-line, double conversion design delivers reliable power and highest levels of uptime.


- Multi-module configurations enhance availability
- Internally redundant design reduces switches to bypass
- Standard 65kA short circuit withstand rating (certain conditions may apply)
- Easy access to key components
- High Mean Time Between Failure (MTBF) performance
- Redundant communication paths ensures reliable control

Capacity, Redundancy, Flexibility


The Liebert® EXM UPS provides future-proof scalability along with matching ancillary cabinets to address your power system demands.

- Maintenance bypass cabinet
- Bypass and distribution cabinet
- Battery cabinet (many run time options), Lithium-ion available with 480V models
- Dual input transformer cabinet
- Paralleling cabinet (parallel for higher capacity or redundancy)

Protection from critical power problems

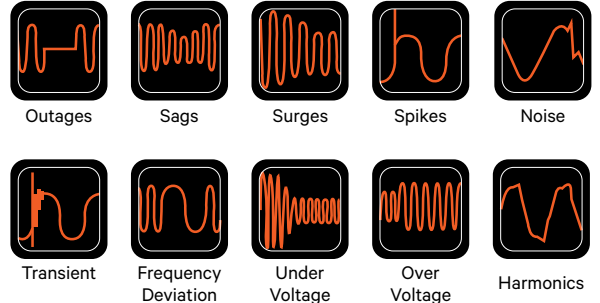

Optimized Ancillaries (various sizes available)

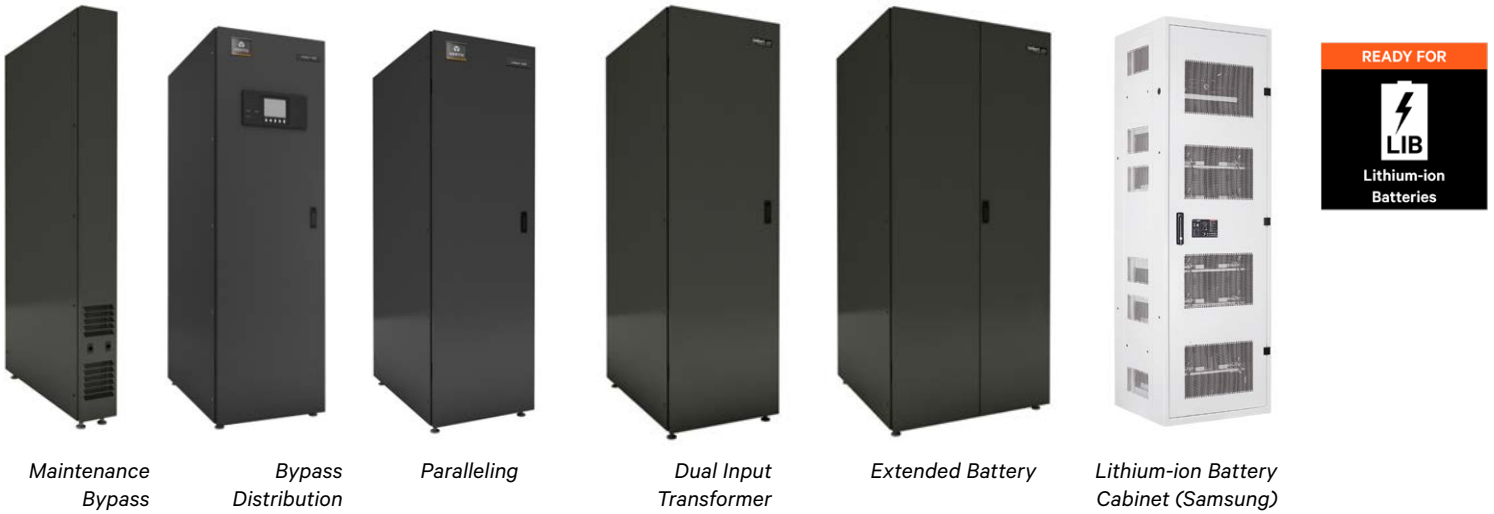

Multi-Module Flexibility


- Matching Paralleling Cabinet supports up to a 2+1 configuration
- Options for up to 4+0 can be supported using third party switchgear



Intuitive, Intelligent Operation at Every Level

Touch-Screen Control Panel Offers Intelligent Control

- Intuitive, easy to use to reduce chances of human error
- Improves productivity by providing information you need
- Power performance parameters visualized
- Service and maintenance support at your fingertips
- Compatible with The Vertiv™ Power Insight

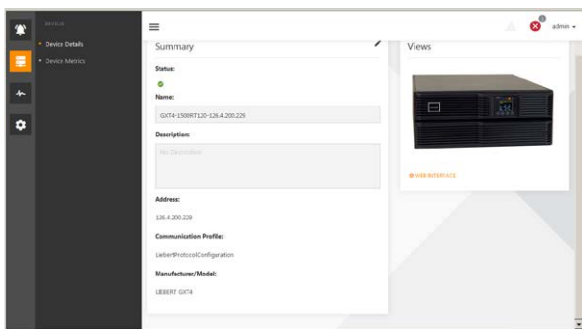

Optional Integrated Albér® Battery Monitoring Systems

- Advance warning of pending UPS battery failures
- Real-time system and component level visibility
- Verify the health of the entire battery system
- Integrated into the battery cabinet



Alber™ BDSUi Battery Monitor

Communications and Environmental Monitoring:

Leverage the capabilities of our Unity Communications card and sensors to easily daisy chain together data inputs.

- Temperature
- Humidity
- Access
- Leaks
- More



SOFTWARE

Vertiv connects and protects your network with core-to-edge solutions and unmatched expertise.

For maximum visibility and effective monitoring in one view, pair your Vertiv™ UPS with a software solution.



Environet Alert

Vertiv™ Environet™ Alert provides industry companies with critical facility monitoring software that is affordable and easy to use. This solution delivers superior monitoring, alerting, trending and data organization. Get monitoring, alerting and trending at a price that's right for your business.



Vertiv™ Power Insight


Vertiv™ Power Insight is a complimentary web-based software designed for users with a distributed infrastructure that need a way to manage multiple devices.

It is a simple to install, easy to use solution that provides a single interface for up to 100 UPSs or rPDUs.

Critical Services And Support

Life™ Services


- 24x7 continuous remote monitoring
- Expert analysis and diagnosis
- Quick, safe and accurate response
- Just one of the professional service & support options available to improve uptime, cost control and resource allocation

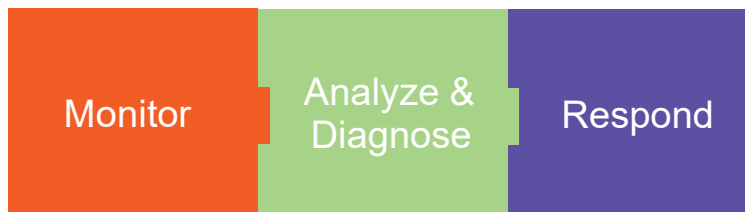

Liebert® Services

Maximizing the performance and efficiency of your data center's uninterruptible power supply (UPS) and other power distribution systems requires systems be properly maintained by factory-trained technicians. Trust Vertiv, Liebert Services to take your critical maintenance to the next level-proactive maintenance that can significantly extend the life of your power systems, decrease your capital investment, optimize system efficiency and effectiveness, and increase overall system availability.

- 24x7 critical maintenance response
- Proactive service, extends system life
- Improved MTBF and MTTR
- Local factory trained engineers ready to respond
- Parts, expertise, satisfaction

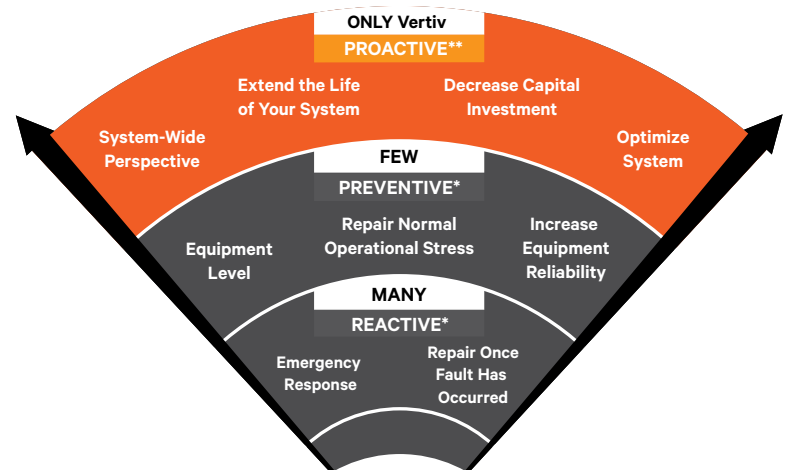

Specifications

		208V Native	208V Native	480V Native	
	Power Rating – kW/kVA	10, 15, 20, 30, 40	60, 80, 100, 120, 140, 160, 180, 200	30, 40, 50, 75, 100, 125, 150, 175, 200, 225, 250	
	Internal Battery Supported	Y	N	N	
Input AC Specifications	Phase/Power Factor/ Freq	3 / 0.99 lagging minimum at full load / 40-70 Hz			
	Input Voltage	208, 220, 480 ¹ , 600 ¹ VAC, 60Hz, 3-phase, 4-wire plus ground			
General Specifications	UPS Technology	On-Line Double Conversion			
Battery Specifications	Battery Test Type/ Battery Technology	Online / Valve-regulated lead acid battery / Lithium-ion (for 480V only)			
Output AC Specifications	Voltage	208/120, 220/127VAC, 60Hz 3-phase, 3- or 4-wire plus ground	480VAC, 60Hz 3-phase, 3-wire plus ground		
	Frequency – Hz	60 Hza			
Communications	Options	3 Liebert IntelliSlots			
	Card Compatibility	IS-UNITY-DP, IS-UNITY-LIFE, IS-485EXI, IS-RELAY			
	Protocols Available	MODBUS-IP, MODBUS-485, BACNET-IP, BACNET-MSTP, SNMP, HTTP, LIFETM Services, Relay Contacts			
Environmental Sensors	Liebert SN Series	Temperature, Humidity, Temperature/Humidity Combination, Contact Closure			
Physical Data UPS	UPS Rating	Unit Weight lb (kg)	Dimensions, W X D X H in (mm)	Unit Weight lb (kg)	Dimensions, W X D X H in (mm)
	10kVA, 15kVA, 20kVA	604 (274)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	N/A	N/A
	30kVA, 40kVA	678 (307.5)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	748 (339)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	50kVA	678 (307.5)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	748 (339)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	60kVA	807 (366)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	N/A	N/A
	75kVA	N/A	N/A	842 (382)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	80kVA	881 (399.6)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	N/A	N/A
	100kVA	955 (433.1)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	842 (382)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	120kVA	1221 (553.8)	34.6 x 39.5 x 78.7 (880 x 1000 x 2000)	N/A	N/A
	125kVA	N/A	N/A	936 (425)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	150kVA	N/A	N/A	936 (425)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	160kVA	1368 (620.5)	34.6 x 39.5 x 78.7 (880 x 1000 x 2000)	N/A	N/A
	175kVA	N/A	N/A	1030 (467)	33.0 x 39.5 x 78.7 (880 x 1000 x 2000)
	180kVA	1442 (654)	34.6 x 39.5 x 78.7 (880 x 1000 x 2000)	N/A	N/A
	200kVA	1516 (687.6)	34.6 x 39.5 x 78.7 (880 x 1000 x 2000)	1030 (467)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)
	225kVA	N/A	N/A	1030 (467)	33.0 x 39.5 x 78.7 (840 x 1000 x 2000)
	250kVA	N/A	N/A	1244 (564)	33.0 x 39.5 x 78.7 (840 x 1000 x 2000)
Physical Data Ancillaries		Weight lb (kg)	Dimensions, W X D X H in (mm)	Weight lb (kg)	Dimensions, W X D X H in (mm)
	600mm Bypass Distribution Cabinet	550 (250)	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	N/A	N/A
	300mm Maintenance Bypass Cabinet	288 (131)	7.9 x 39.5 x 78.7 (200 x 1000 x 2000)	288 (131)	11.8 x 39.5 x 78.7 (300 x 1000 x 2000)
	200mm Maintenance Bypass Cabinet	198 (90)	7.9 x 39.5 x 78.7 (200 x 1000 x 2000)	198 (90)	N/A
	1200mm Battery Cabinet	N/A	N/A	4907 (2226) with HX540 batteries	1200mm battery cabinet 47.3 x 39.5 x 78.7 (1200 x 1000 x 2000)
	880mm Battery Cabinet	3649 (1656) with HX540 batteries	34.7 x 39.5 x 78.7 (880 x 1000 x 2000)	2962 (1344) with HX300 batteries	34.7 x 39.5 x 78.7 (880 x 1000 x 2000)
	600mm Battery Cabinet	2454 (1114) with HX330 batteries	23.6 x 39.5 x 78.7 (600 x 1000 x 2000)	N/A	N/A
	320mm Battery Cabinet	1432 (650) with HX205 batteries	12.6 x 39.5 x 78.7 (320 x 1000 x 2000)	N/A	N/A
	Lithium-ion Battery Cabinet (Samsung)	N/A	N/A	1200 (545) with batteries	26 x 24 x 81 (650 x 600 x 2055)
Environmental		Operating Temperature , °F (°C): UPS: 32° to 104°F (0-40°C); Battery: 68° to 86°F (20-30°C). Relative Humidity : 0% to 95%, non-condensing. Operating Altitude : Up to 3,300 ft. (1,000m) without derating. Acoustical Noise, db, at 39 in. : Less than 59 dBA typical, 3.3 ft. (1m) from the unit			
Agency/Certification/ Conformance		Listed to UL 1778 , UL 924 and CSA certified. Meets current requirements for safe high performance UPS operation. ENERGY STAR® qualified. Seismic and OSHPD certified.			
Warranty Standard		1 year			



Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2021 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.

SL-26003 (R04/21)